



Chauffage électrique

- Ventilation 3-4 vitesses
- Tension de commande et de ventilation : 12V ou 24V
- Tension de chauffage : 48V, 80-96V, 120V, 240V ou 400-600V
- Thermostat de sécurité
- Différentes façades:
 - Version D : 6 manchons Ø55mm (obturateur 0420 3604)
 - Version F : 4 diffuseurs d'air orientables Sensyo® II 84
- Livré avec connecteur
- Option ventilateur Brushless et contrôleur de vitesse PWM. Contre-connecteur et faisceau sur demande

Version B : en cas de forte perte de charge consultez-nous

Electric heater

- 3-4 speed ventilation
- Control and blower voltage: 12V or 24V
- Heating voltage: 48V, 80-96V, 120V, 240V ou 400-600V
- Safety thermostat
- Different front panels:
 - D version: 6 sleeves Ø55mm (obturator 0420 3604)
 - F version: 4 adjustable air diffusers with flap Sensyo® II 84
- Supplied with connector
- Brushless blower and PWM speed controller option. Mating connector and harness on demand



B version: contact us if your unit pressure loss is high



VERSION D



VERSION F

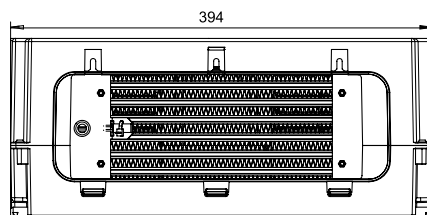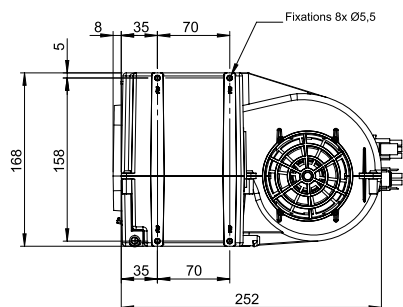


Connecteur Thermostat de sécurité
Safety thermostat connector
2 way male housing
MATE-N-LOK 350777-1



Brushless version

CONNECTEUR PWM
PWM CONNECTOR
Porte-contacts 5 voies + contacts femelles
5 positions housing + female terminals
Type Universal MATE-N-LOK 5 circuits
TE Connectivity 1969809-1

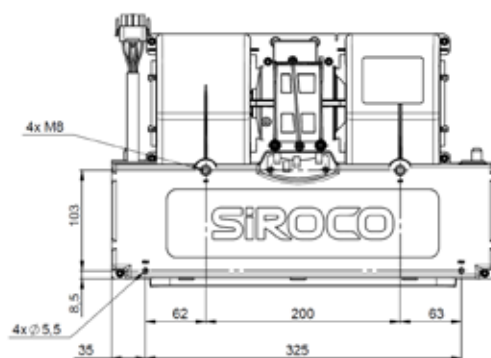

Tension Voltage	E-SANOA HV B 48V 3 vitesses / 3 speeds	E-SANOA HV B 80V-96V 3 vitesses / 3 speeds	E-SANOA HV B 120V 3 vitesses / 3 speeds	E-SANOA HV B 240V 3 vitesses / 3 speeds	E-SANOA HV B BLDC 240V	E-SANOA HV B 400-600V 3 vitesses / 3 speeds	E-SANOA HV B BLDC 400-600V
12V	0177 0200	0177 0210	0177 0220	0177 0230	0177 0232	0177 0240	0177 0242
24V	0177 0201	0177 0211	0177 0221	0177 0231	0177 0233	0177 0241	0177 0243

Tension de chauffage Heating voltage	Puissance électrique ventilation Ventilation electrical power	Poids Weight	Débit d'air nominal Nominal air flow	Puissance calorifique Heating capacity
48 V	195 W	4.4 kg	600 m³/h	2,5 kW
80-96 V	195 W		600 m³/h	3 kW
120 V	195 W		600 m³/h	3,1 kW
240 V	195 W		600 m³/h	3 kW
400-600V	195 W		600 m³/h	2,45 kW